
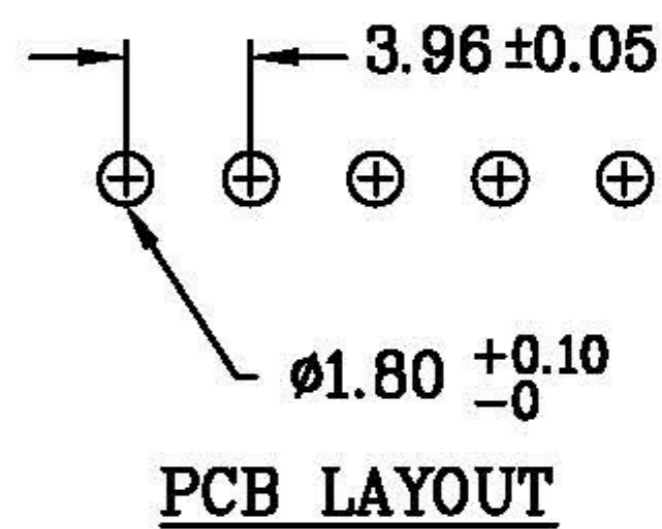


成品製造管制圖  
DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質  
Non-use Warranty for Level 1  
Prohibited Substances in Product.

Pich 3.96mm  
間距 (.156")

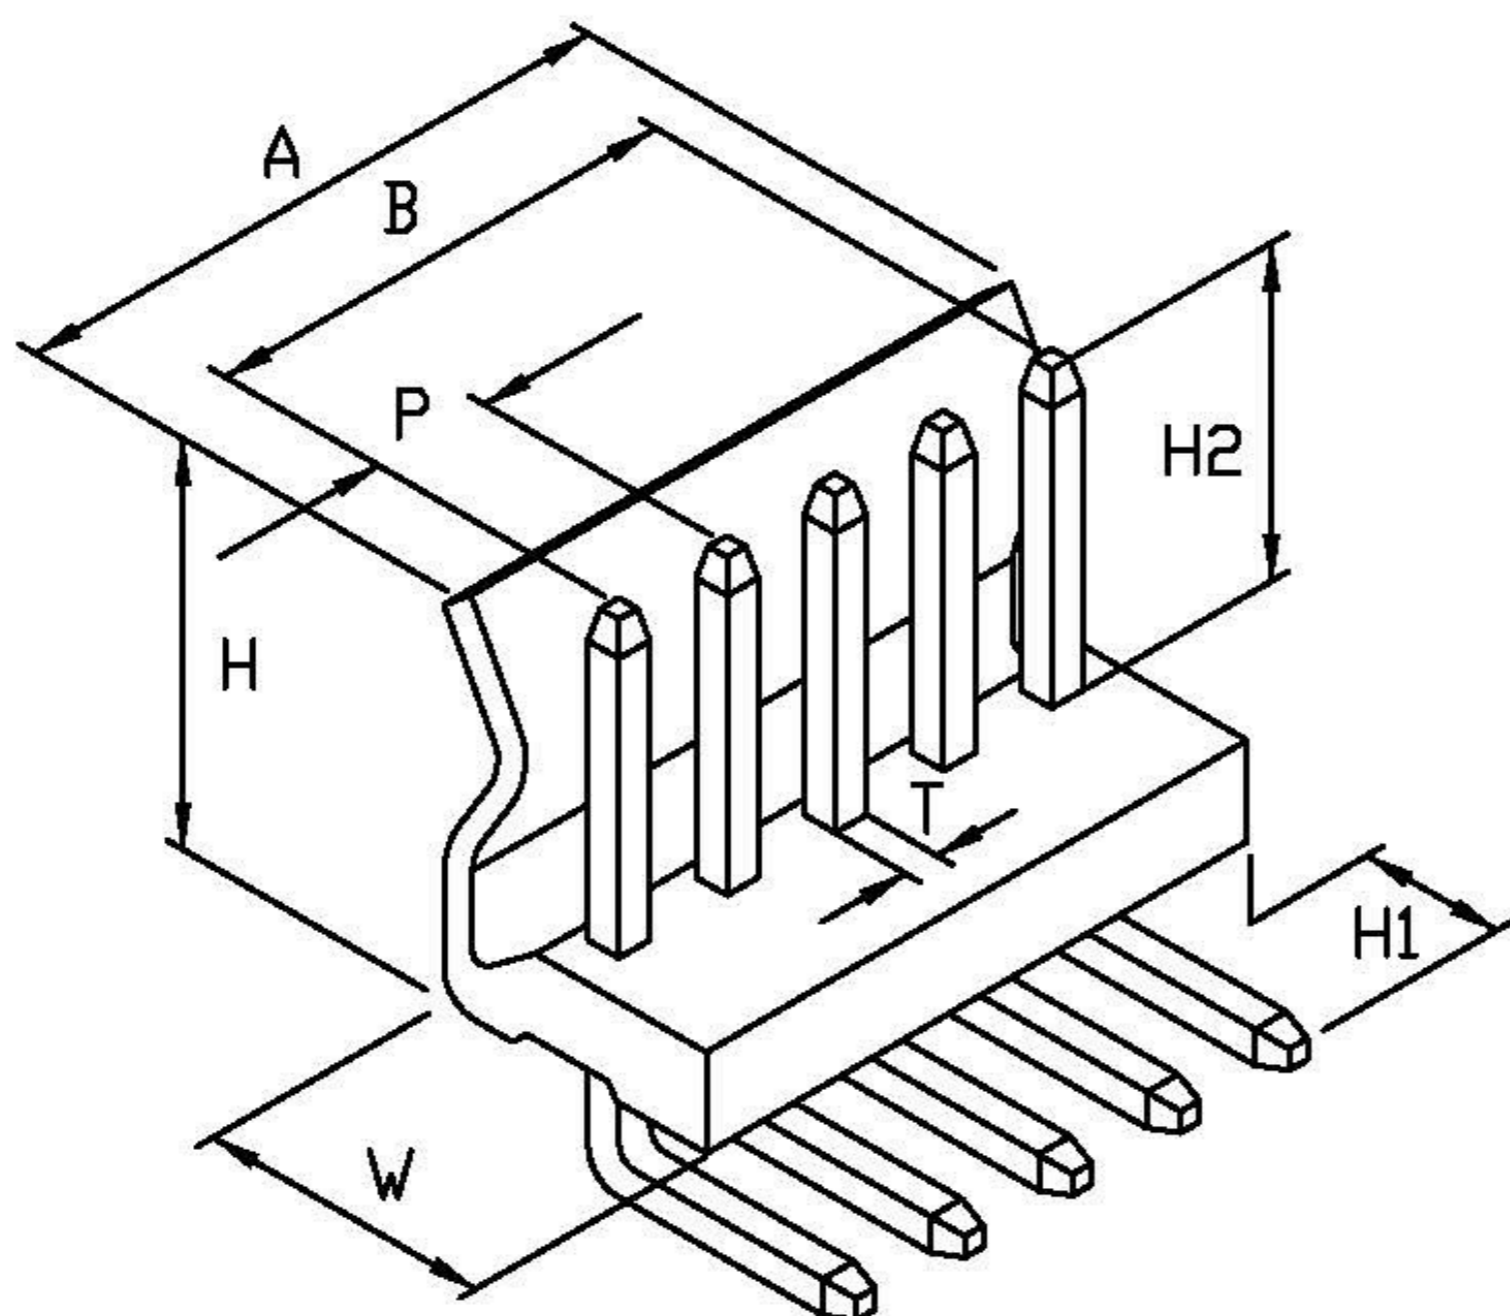

產品編號 Part No:  
品名 Product: 塑膠公座-DIP CONNECTOR-DIP  
材質 Material: Housing: NYLON 94V-2  
Contact Pin: Brass, Tin plated.

DIMENSION (MM)  
P: 3.96 ± 0.1  
W: 9.6 ± 0.2  
H: 12.6 ± 0.3  
H1: 3.6 ± 0.3  
H2: 11.6 ± 0.3  
T: 1.14 ± 0.03

PIN	A±0.3	B±0.2
2	7.92	3.96
3	11.88	7.92
4	15.84	11.88
5	19.80	15.84
6	23.76	19.80
7	27.72	23.76
8	31.68	27.72
9	35.64	31.68
10	39.60	35.64
11	43.60	39.60
12	47.56	43.56

額定電壓/電流 Current Rating:  
AC/DC 250V 10A (18~24AWG#)  
絕緣阻抗 INS. Resistance: 1000MΩ Min.  
耐電壓 Withstand Voltage: 1000V AC/1minute.  
適用溫度 Operation Temp: -25°C~+85°C  
顏色 Colour: 本色 (Natural)

\* 本成品圖僅供參考, 若需做為承認用請聯絡就近業務員確認  
(The drawing is for reference only,  
please contact the sales division nearby for final confirmation if it's for approval purpose.)